




PHARMACARE

LABCARE

The V4468-KIR 'Radio Frequency Identification' (RFID) SmartFridge is a high performance refrigerator that has been specifically developed for the Pharmacy & Laboratory environment. SPACECODE's powerful RFID technology reduces manual involvement and errors in counting and stock-taking processes and provides real-time actionable product visibility, workflow automation and inventory monitoring. Resulting in more effective workflows, maximal inventory control, optimized patient care and lower costs.

FEATURES



RFID Access Card Reader



Biometric Fingerprint Access



LED Illumination

Stainless Steel Drawers



Digital Display Panel


Emergency Manual Key Release

Cased in Premium Grade Galvanized Steel (rust proof)

Glass Door

RFID Scanning

Mounted on Wheels

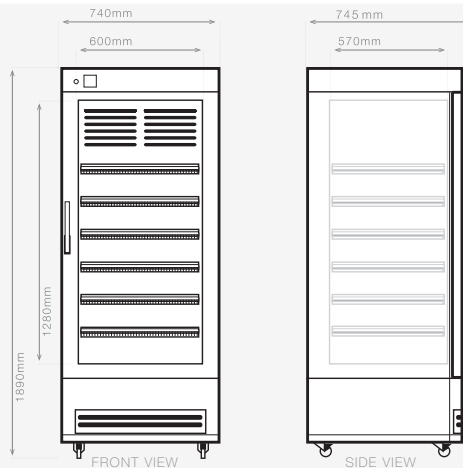



AUTOMATED 24/7 TRACK-AND-TRACE
continuously tracking stocks



ALWAYS ON SMART SOFTWARE
ensuring data is always accessible



INSTANT VISIBILITY WORLDWIDE
enhancing security and monitoring

V4468-KIR RFID SmartFridge

SPECIFICATIONS

DIMENSIONS	EXTERNAL DIMENSIONS INTERIOR FITTINGS / DIMENSIONS NO. OF DRAWERS / DIMENSIONS WEIGHT VOLUME	740 X 745 X 1890 [MM] (W X D X H WITH HANDLES, EMERGENCY KEY AND WHEELS) 600 X 570 X 1280 [MM] (W X D X H) 5X STAINLESS STEEL DRAWERS 150 KG 460 LITERS
MATERIAL	EXTERIOR / INTERIOR BODY DOOR INSULATION INTERIOR LIGHTING	GALVANISED STEEL / ALUMINUM GLASS WITH METAL FRAME DOUBLE LAYER 55MM INSULATION LED
OPERATING PARAMETERS	TEMPERATURE RANGE TEMPERATURE SET / DISPLAY / ALARM COOLING SYSTEM DEFROSTING	+2° C TO +20° C YES FORCED WITH CROSS FORCE BLOWER AUTOMATIC WITH TIME LIMIT AND TEMPERATURE MONITORING
RFID SYSTEM	CARRIER FREQUENCY TECHNOLOGY TAG TYPE CHIP TYPE / MEMORY DATA DURABILITY ALARMS	125 KHZ GLOBAL FREQUENCY STANDARD (119.7 KHZ) SPACECODE PASSIVE RFID REFER TO SPACECODE RFID TAG DATASHEET SPC R8 READ ONLY 126 BITS - SPC E2 READ-WRITE 126 BITS 10 YEARS DOOR OPEN DETECTOR - POWER FAILURE SENSOR - HI/LO TEMPERATURE SENSOR
ACCESS CONTROL	LOCK ACCESS CARD EMERGENCY KEY	ELECTRONIC 13.56MHZ : PHILIPS MIFARE®, I-CODE®, INSIDE PICOTAG® PICOPASS®, HID ICLASS®, LEGIC ADVANT®, SONY FELICA , ISO15693 AND NFC COMPLIANT EMERGENCY MANUAL KEY RELEASE
COMMUNICATION	ETHERNET	YES
SOFTWARE	SOFTWARE DEVELOPMENT KIT BUSINESS APPLICATION	.NET CLIENT TCP/IP SMART-TRACKER™ WITH CENTRAL OR LOCAL DATABASE
POWER	POWER SUPPLY POWER CONSUMPTION AMBIENT OPERATING TEMPERATURE	220-240V AC, 50-60HZ - POWER ON SWITCH 516W MAX 10° TO 38°C (INDOOR USE)
CERTIFICATIONS	APPLICABLE DIRECTIVES STANDARDS OF CONFORMITY	89/336/EEC ELECTROMAGNETIC DIRECTIVE EN301 489-1 V1 8.1 - ETSI EN 300 330-2 V1.5.1 - EN 50364 OF 2010 FCC PART 15A RADIATED LIMITS CE
AVAILABLE OPTIONS		PC TOUCH SCREEN PANEL BIOMETRIC FINGERPRINT ACCESS WIFI SOLID DOOR



ISO 9001 CERTIFIED

12 rue des Petits Ruisseaux
91370 Verrière-le-Buisson, France
T + 33 1 69 752 170
F + 33 1 60 110 031
info@spacecode.com

SPACECODE.COM